

## Introducing the Autobag PI 412cw Prism— Two-sided, in-line printing extends flexibility for packaging productivity.

Capable of imprinting on two locations of the bag at speeds up to 300mm per second, which equates to approximately 80 bags per minute in-line, this programmable thermal transfer printing system has been designed to meet all the latest industry-specific printing requirements. The PI 412cw Prism is simple to use, dependable and operationally flexible to give maximum uptime and packaging productivity. When used in conjunction with the Autobag AB 180 bagging system, product identification utilising barcodes, text and graphics can be easily applied to individual packages in-line, on the bag, front and back. The printed bags are then indexed for product loading and sealing in a simple “Print-n-Pack” operation. Label changes can be achieved in an instant by simply accessing pre-stored label designs or through database downloads with a PC connection.

Utilising the very latest technology, the Autobag PI 412cw Prism is capable of printing virtually all barcodes available today, including 2D barcodes and UPS MaxiCode. The 8 megabytes of memory facilitate more label and font storage which gives easier access to more stored jobs allowing fast changeover and maximum system uptime.

### User Benefits

- Quick to set-up, easy to operate, reliable and fast
- High resolution printing for clarity and high impact
- Removes need for separate labelling operation
- Available in 3 configurations: front & back, side-by-side or even stand-alone
- Increased print speeds up to 300mm per second with the 203 dpi printhead and up to 200mm per second on the 300 dpi printhead
- Large memory for label and font storage
- Autobag “Print-n-Pack” systems are designed to interface with AutoLabel software or existing customer software for maximum flexibility
- Supports over 40 barcodes including 2D barcodes and True-type fonts



BPM

20

30

40

50

60

70

80

00095687 007



### Standard Features

- Print speeds:
  - 300mm per second with 203 DPI printhead
  - 200mm per second with 300 DPI printhead
- Universal connectivity with Serial and Parallel Port allowing flexibility in communicating with software and databases
- 8 megabytes of On Board Memory stores job data ready for recall at a later time
- Tensioning and buffer (festoos) control allows printer to work independently of the bagger providing increased speeds and registration control, which ensures vertical positioning of in-line printing is accurate to +/- 1.6mm
- Target Registration Control allows precise print adjustments while imprinter is running
- Ribbon Saver feature advances printing ribbon only when printing is in process, significantly reducing waste
- Resident Barcodes: Code 39, UPC-A, UPC-E, Code 128-A, B, C, Interleaved 2 of 5, EAN-8 & 13, Codabar, UPC 2 & 5 digit addendums, HIBC, Code 93, Postnet, PDF 417, USD 8, Datamatrix, QR Code, Aztec, Plessey, Telepen, Micro PDF 417, UPS MaxiCode, FIM, TLC 39



#### Expansion Slots

Designed for easy changeover of boards and provides the ability to expand connectivity via USB, Ethernet and AS-400 as well as expand fonts and languages.

### Options

- AutoLabel™ software
- Stand Alone Label Design Kit
- Ethernet, Twinax/Coax Connections
- Printhead alignment tool
- Spare parts kits
- Bag re-winder

### Technical Specifications


**Weight:** 114 kg with winder

93 kg single head w/winder

**Electrical:** 110/230 VAC; (50/60 Hz)

**Approvals:** CE

**Dimensions:**

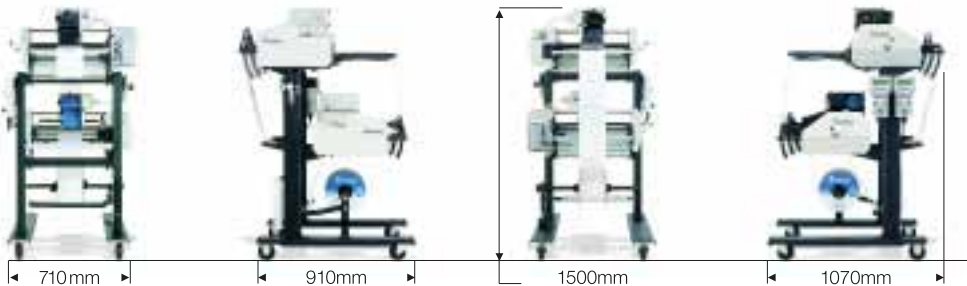

### Typical Applications


- Automotive & appliance parts
- Hardware & DIY
- Electrical & electronic
- Fasteners & connectors
- Plumbing & heating
- Hobby & craft
- Jewellery & novelty items
- Cosmetics & beauty aids
- Disposable health care



#### In-Line or Off-Line Printing.

The PI 412cw Prism has the capability to operate in-line with the AB 180 or AB 255 bagger.

It can also be retrofitted with an optional re-winder and operate as a stand alone unit for off-line printing needs.

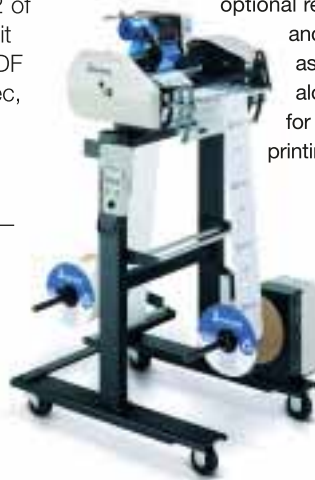

### Mechanical Features

The PI 412cw's pivoting design makes accessing the printhead for cleaning and preventative maintenance a snap.



Festoos control, a PI 412cw exclusive, allows printer to run continuously — independent of the bagger — ensuring speed and print registration.



Flexible design allows for system reconfiguration to allow 2-colour print on the same side of the bag.



Automated Packaging Systems Ltd.  
 Enigma Business Park  
 Sandy's Road, Malvern  
 Worcestershire WR14 1JJ  
 Tel: +44 (0) 1684 891 400  
 Fax: +44 (0) 1684 891 401  
 E-mail: [contact@autobag.co.uk](mailto:contact@autobag.co.uk)